Welltech Instrument Company Ltd

Acceleration FBG

Acceleration FBG (Acceleration Fiber Bragg Grating Sensor)

Suitable for vibration, security sensing
Application: bridge monitoring, pipeline security monitoring

Acceleration FBG Sensor

Type1:

- Range: 5g
- Frequency Range: 0-40Hz
- Dimension: 72x54x37.5mm

Type2:

- Range: 0.5g
- Frequency Range: > 100Hz
- Dimension: 54x48x24.5mm

- Wavelength: 1525 to 1565nm
- Working Temperature: -30 to 70degC

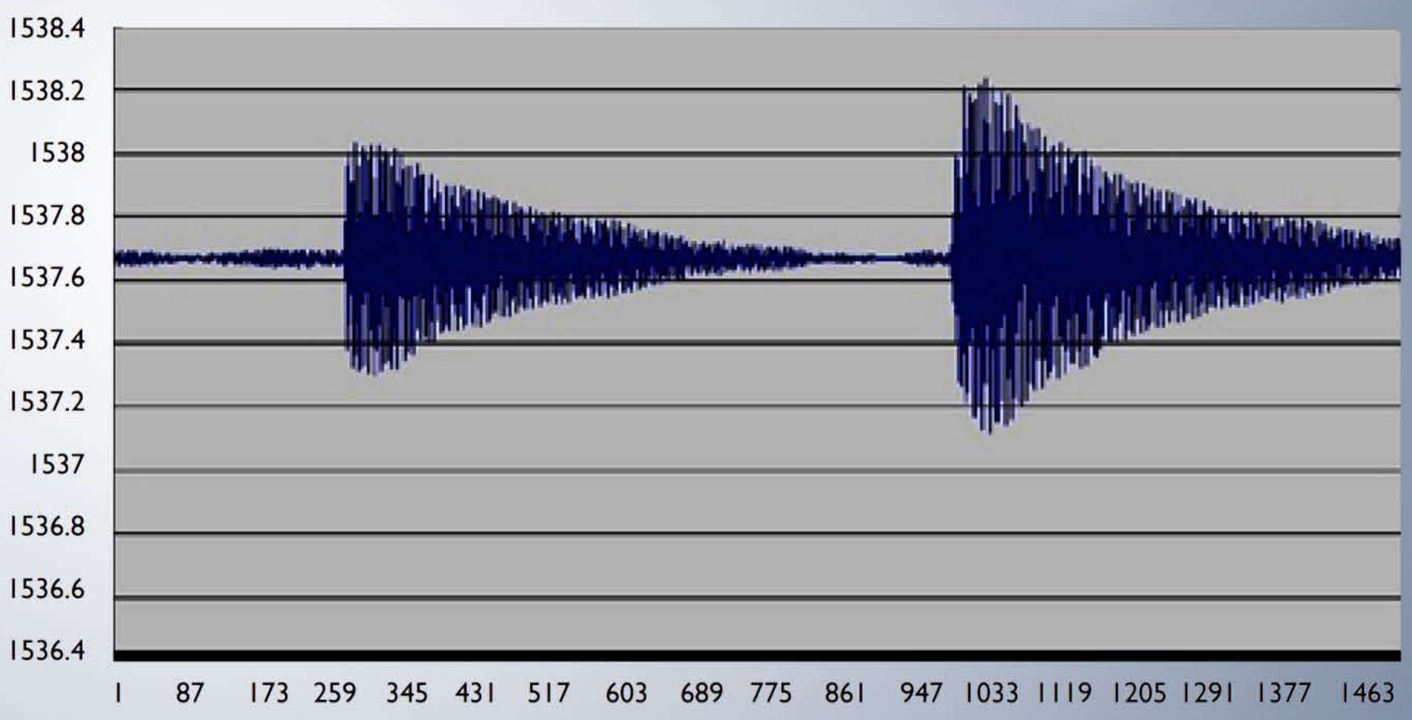

Ordering Code

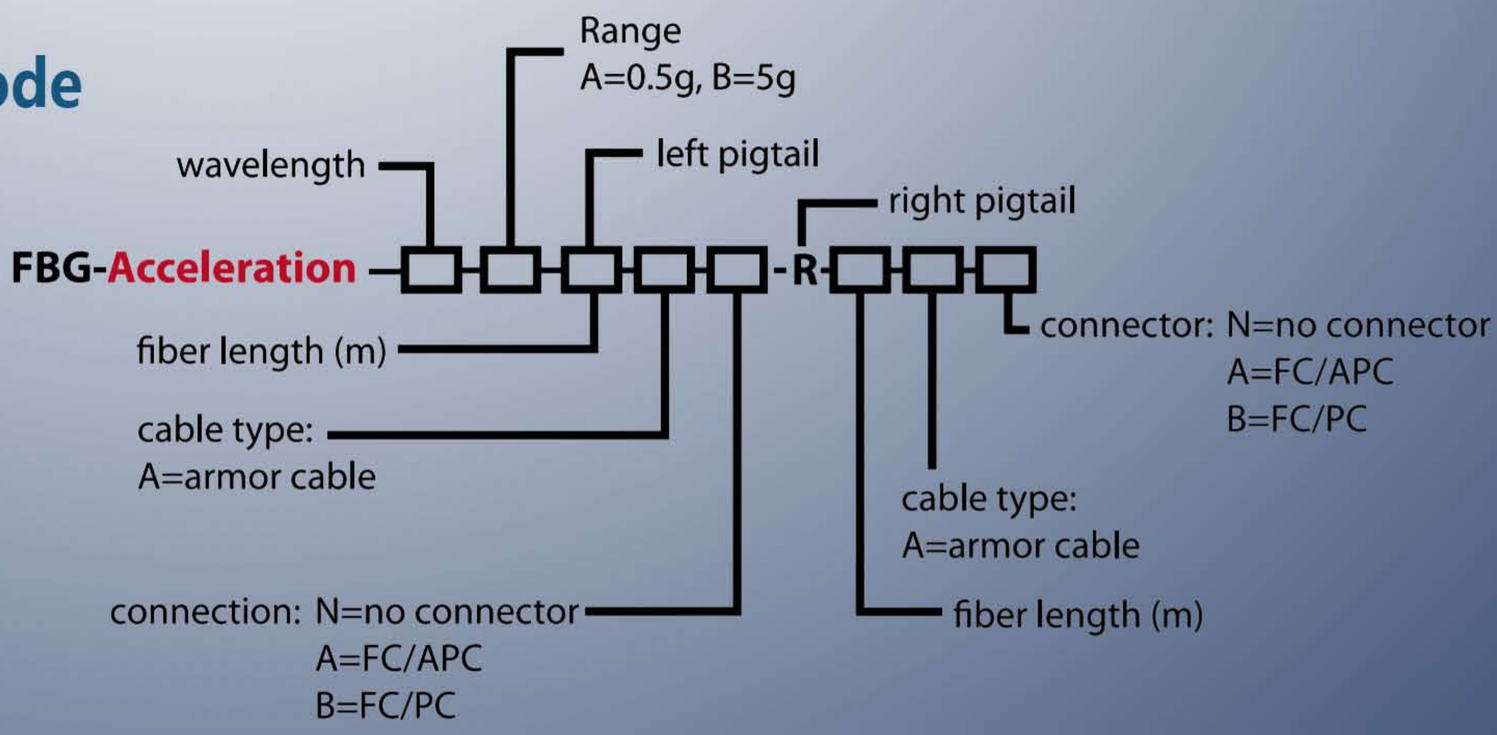

Suit 2611, Office Tower Langham Place, 8 Argyle Street, Mongkok, Kowloon, Hong Kong
Tel: 852-23491224 Fax: 852-26669436 info@fbg.com.cn